



JUMP CONVEYORS

Workhorse, Custom-Engineered Conveyors Easily Shift Into Operation



Rock Face to Load Out™



OPTIONS

OPERATION

- » Radial Receiving Hopper
- » 6-foot (1.8m) Discharge Support
- » Anchor Pivot Plate
- » Belt Scale


MAINTENANCE

- » Exterra® Primary Belt Cleaner
- » Moxie® Rolls
- » Urathon® Return Rolls
- » Impact Rolls
- » Auto Greaser


MOBILITY

- » Power Travel
- » Strut Axle
- » Landing Gear
- » Fifth Wheel Hitch
- » Lights and Brakes
- » Tow Eye

SPECIFICATIONS

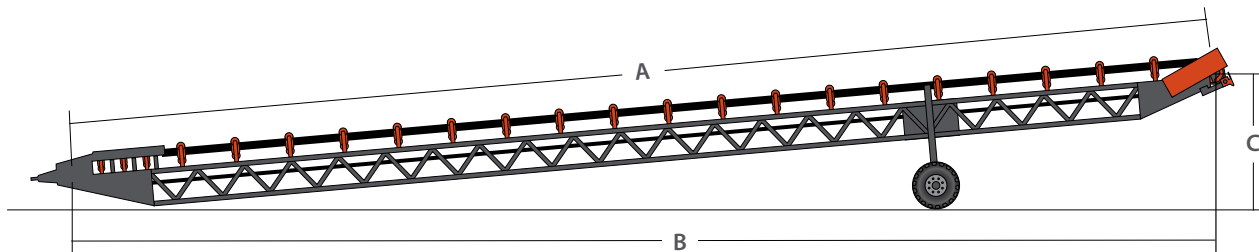

OPERATING DIMENSIONS	40'	50'	60'	80'	100'
(A) Conveyor Length (m)	40'-0" (12.1)	50'-0" (15.2)	58'-9" (17.9)	80'-0" (24.4)	100'-0" (30.5)
(B) Conveyor Ground Length (m)	40'-3" (12.2)	45'-10" (14.0)	49'-4" (15.0)	79'-9" (24.4)	94'-9" (28.9)
(C) Raised Height to Center of Pulley (m)	11'-7" (3.5)	12'-4" (3.7)	13'-7" (4.1)	12'-2" (3.7)	11'-11" (3.6)
Lowered Height to Center of Pulley (m)	7'-4" (2.2)	7'-10" (2.3)	6'-11" (2.1)	6'-10" (2.0)	7'-9" (2.3)

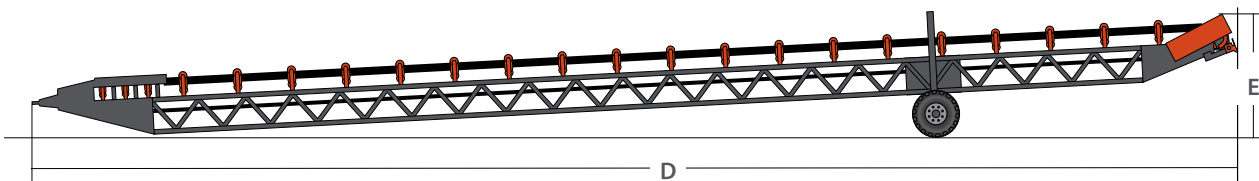

TRAVEL DIMENSIONS	40'	50'	60'	80'	100'
(D) Travel Length - 36" Belt Width (m)	44'-8" (13.6)	54'-9" (16.7)	64'-9" (19.8)	84'-9" (25.9)	71'-6" (21.7)
(E) Travel Height - 36" Belt Width (m)	8'-11" (2.7)	8'-10" (2.6)	9'-4" (2.8)	9'-5" (2.8)	14'-1" (4.2)
Travel Width - 36" Belt Width (m)	8'-6" (2.5)	8'-0" (2.4)	9'-3" (2.8); Dual 10'-1" (3.0)	9'-1" (2.7)	11'-11" (3.6); Dual 10'-5" (3.1)
Weight at Axle - 36" Belt Width (kg)	5,186 (2,352)	4,553 (2,065)	4,700 (2,131)	7,000 (3,175)	8,700 (3,946)
Weight at Kingpin - 36" Belt Width (kg)	1,463 (663)	1,910 (866)	2,400 (1,088)	3,000 (1,360)	2,900 (1,315)