



SLIDE-PAC™ CONVEYORS

Quickly and Safely Roll Conveyors From Transport to Operation Instead of Risky Lifting



SLIDE-PAC TRANSFER CONVEYORS




SLIDE-STAC CONVEYOR STOCKPILING


Rock Face to Load Out™



SPECIFICATIONS

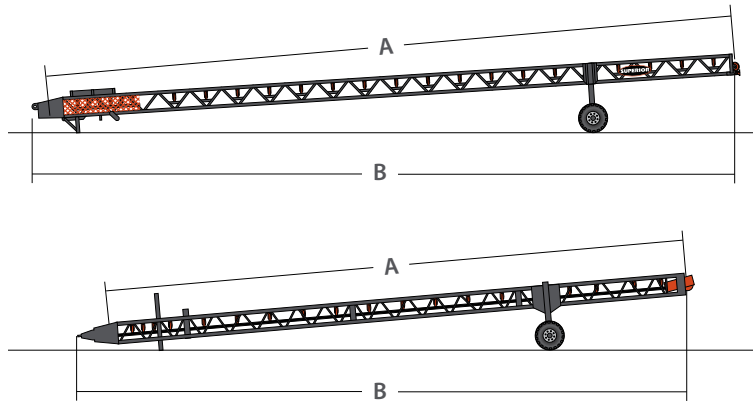

SLIDE-PAC CONVEYORS				SLIDE-STAC CONVEYORS	
OPERATING DIMENSIONS	60'	70'	80'	60'	70'
(A) Conveyor Length (m)	60'-0" (18.3)	70'-0" (21.3)	80'-0" (24.4)	60'-0" (18.3)	70'-0" (21.3)
(B) Conveyor Ground Length (m)	58'-9" (18.0) to 59'-7" (18.2)	68'-10" (21.8) to 69'-7" (21.2)	79'-1" (24.1) to 79'-7" (24.3)	56'-7" (17.2)	66'-1" (20.1)
Raised Height to Center of Pulley (m)	Varies	Varies	Varies	Varies	Varies
Lowered Height to Center of Pulley (m)	Varies	Varies	Varies	Varies	Varies

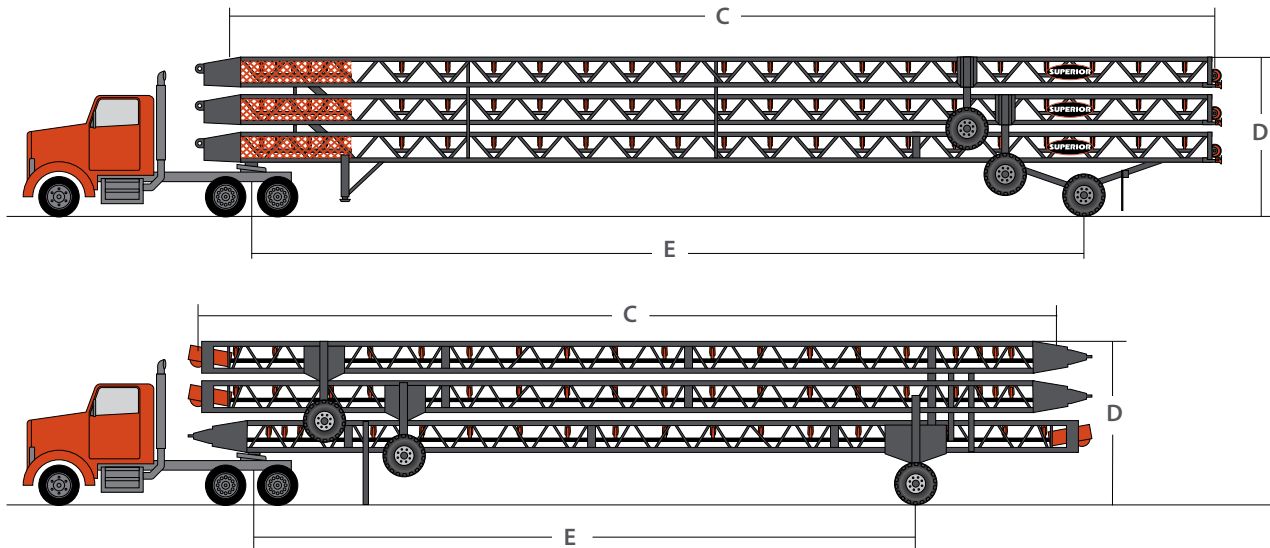

SLIDE-PAC CONVEYORS				SLIDE-STAC CONVEYORS	
TRAVEL DIMENSIONS	60'	70'	80'	60'	70'
(C) Travel Length (m)	59'-8" (18.2)	69'-8" (21.2)	79'-8" (24.2)	59'-8" (18.1)	69'-8" (21.2)
(D) Travel Height (m)	13'-6" (4.1)	13'-6" (4.1)	13'-3" (4.0)	13'-2" (4.0)	13'-5" (4.0)
Travel Width (m)	10'-1" (3.1)	9'-11" (3.0)	9'-11" (3.0)	11'-11" (3.6)	12'-0" (3.6)
(E) Kingpin to Axle (m)	44'-9" (13.6)	54'-9" (16.6)	64'-9" (20.0)	36'-11" (11.2)	49'-2" (15.0)
Weight at Axle (kg)	19,000 (8,618)	21,000 (9,525)	22,000 (9,979)	24,700 (11,203)	28,300 (12,836)
Weight at Kingpin (kg)	10,000 (4,535)	12,700 (5,760)	13,900 (6,304)	6,800 (3,084)	11,200 (5,080)