



# SLIDE-STAC™ CONVEYORS

Three Radial Stacking Conveyors Packed in One Towable Load



SLIDE-STAC CONVEYORS




SUPERIOR COMPONENTS


Rock Face to Load Out™



# SPECIFICATIONS

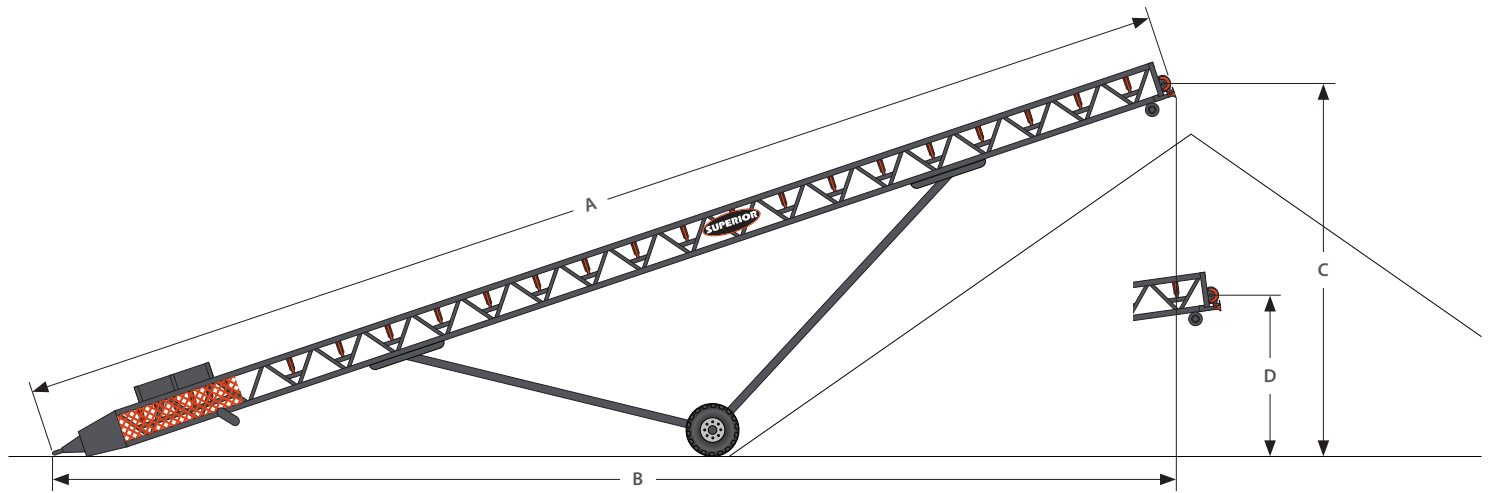

	36" x 60'						36" x 70'					
	Top Unit		Middle Unit		Trailer Unit		Top Unit		Middle Unit		Trailer Unit	
	ft x in	m	ft x in	m	ft x in	m	ft x in	m	ft x in	m	ft x in	m
<b>OPERATING SPECIFICATIONS</b>												
(A) Conveyor Length	59'-8"	18.2	59'-8"	18.2	59'-8"	18.2	69'-8"	21.2	69'-8"	21.2	69'-8"	21.2
(B) Conveyor Ground Length	56'-6"	17.2	56'-9"	17.3	56'-9"	17.3	66'-0"	20.1	66'-1"	20.1	66'-3"	20.2
(C) Raised Height to Center of Pulley	20'-7"	6.2	19'-10"	6.0	19'-11"	6.0	23'-8"	7.2	23'-6"	7.1	23'-1"	7.0
(D) Lowered Height to Center of Pulley	8'-9"	2.6	8'-4"	2.5	7'-10"	2.3	10'-3"	3.1	9'-9"	2.9	7'-6"	2.2
Highest Incline Angle	18.8°		17.8°		18.0°		18.5°		18.4°		18.0°	

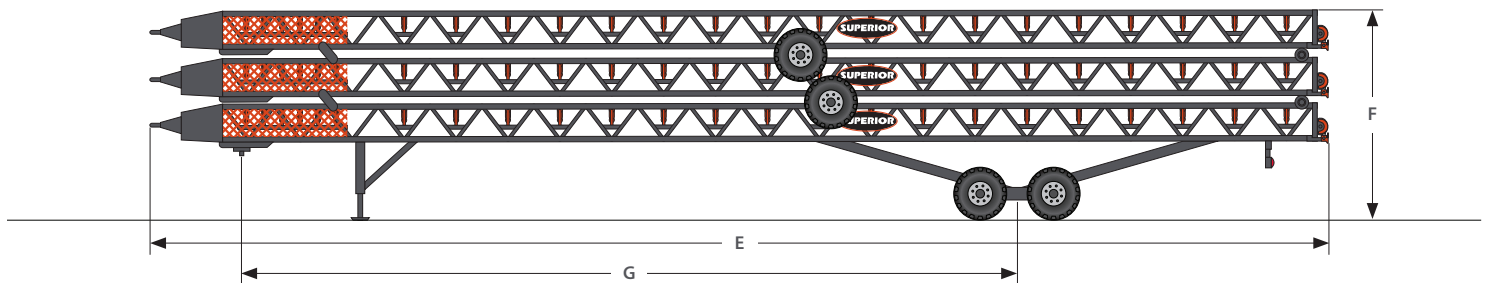

	36" x 60'		36" x 70'	
	ft x in	m	ft x in	m
<b>TRAVEL SPECIFICATIONS</b>				
(E) Travel Length (m)	59'-0"	18.0	69'-0"	21.0
(F) Travel Height (m)	13'-1"	4.0	13'-5"	4.0
Travel Width (m)	11'-11"	3.6	11'-11"	3.6
(G) Kingpin to Axle (m)	36'-11"	11.2	49'-2"	15.0
<b>WEIGHTS</b>				
	lbs	kg	lbs	kg
Weight at Axle (kg)	24,659	11,185	28,263	12,819
Weight at Kingpin (kg)	6,752	3,062	11,193	5,077