

FLEX-MAT®

HIGH VIBRATION WIRE SCREEN


TENSIONED SERIES



FLEX-MAT®

HIGH VIBRATION WIRE SCREEN

TENSIONED SERIES

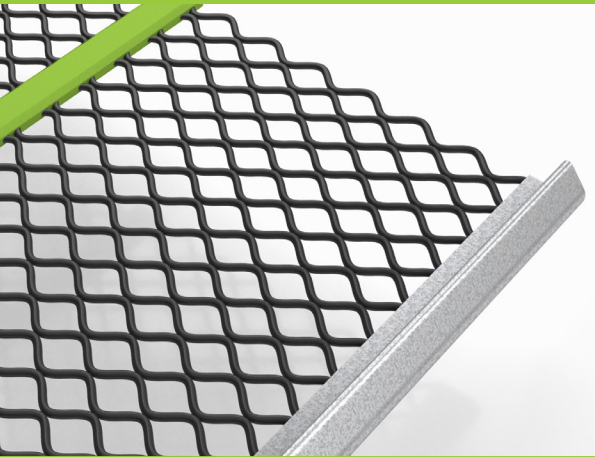


TENSIONED
SERIES

D

- For standard applications and precise sizing
- Square opening replaces woven square cloth and increases throughput
- Eliminates blinding and pegging

> Opening Sizes

0.059" – 4"
(1.5 mm – 101.6 mm)

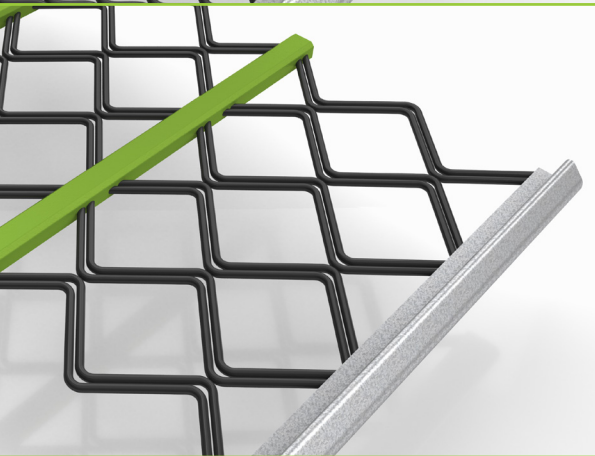


TENSIONED
SERIES

DD

- For high-impact and heavy-material applications as it absorbs impact better than other applications
- Eliminates the “popcorn effect” caused by larger single wires

> Opening Sizes

1.125" – 4"
(28.6 mm – 101.6 mm)

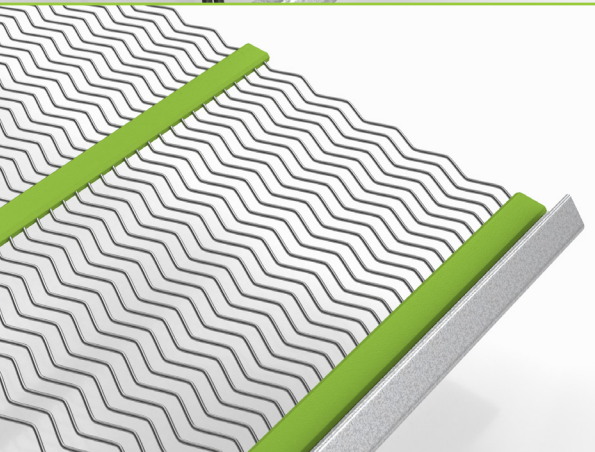

TENSIONED
SERIES

S

- For round or cubical-shaped material, or when precise passing is not required
- Replaces slotted woven cloth
- Maximizes open area
- Eliminates blinding
- Reduces fines


> Opening Sizes

0.059" – 2"
(1.5 mm – 50.8 mm)

FLEX-MAT®

HIGH VIBRATION WIRE SCREEN

TENSIONED SERIES

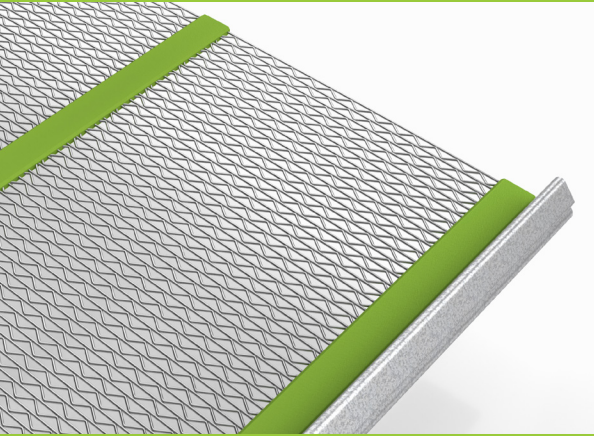


TENSIONED
SERIES

T

- Ideal for openings under 0.059" or 1.5 mm
- Replaces fine mesh to better reduce blinding

> **Opening Sizes**

0.020" – 2"
(0.5 mm – 50.8 mm)

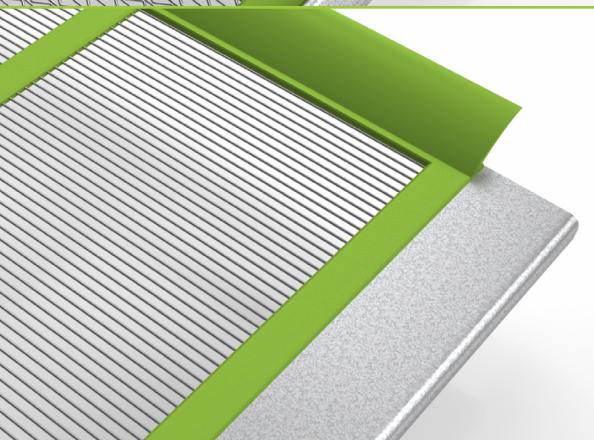

TENSIONED
SERIES

L

- Maximum open area for desanding and removing fines
- Lasts longer than traditional harp/piano wire while keeping material in spec
- Ideal for compost and topsoil

> **Customized to specific applications**

Starting at 0.031"
(0.8 mm)

