



MAGNET CONVEYOR







The Lippmann magnet conveyors are perfect for any application where a magnet is required. Set-up specifically for recycling applications with the conveyor featuring a self-cleaning magnetic, reinforced belting, special wear alloys and vibrating pan feeder at feed end for conveyor protection.

- For recycling applications
- Magnetic separators
- Reinforced belting
- Special wear alloys
- Vibrating pans



LWM6032

LWM6065

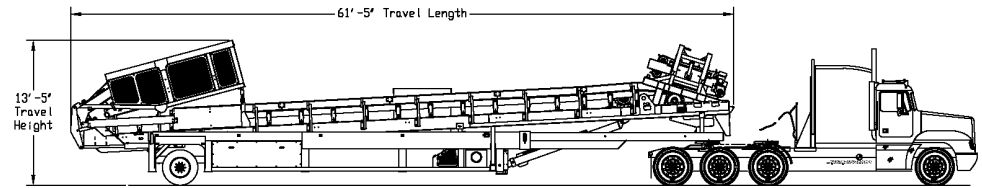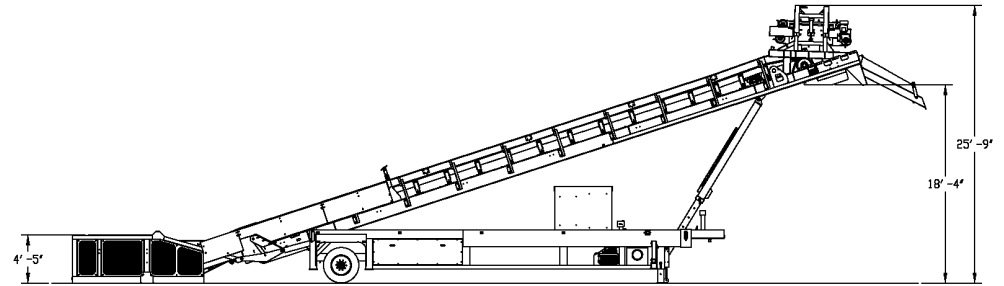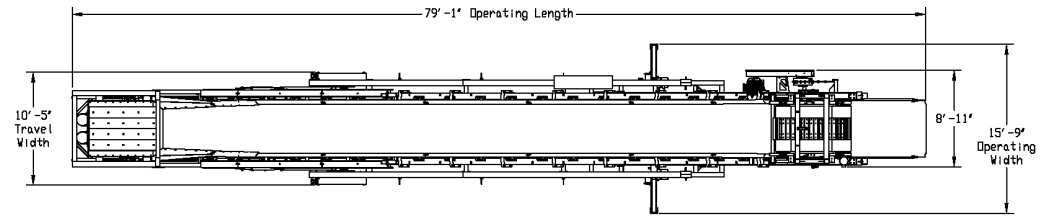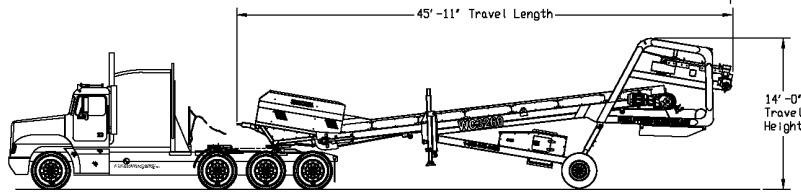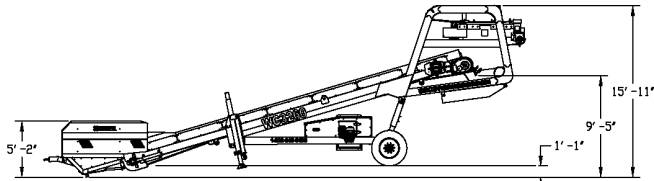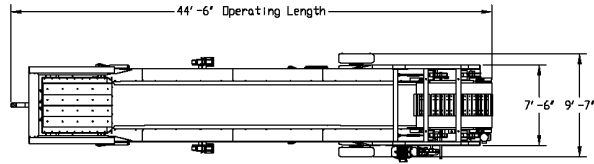

SPECIFICATIONS

LWM6032

Conveyor Specs

Belt Width	60"
Belt Length (pulley centers)	32'
Belt Type	4 Ply, 440 PIW, 1/4" Top Cover
Drive Motor	25 Hp
Pan Feeder	48" x 72"
Drive Motor @ 60 hz	2 x 2.4 Hp
Magnet	Dings Electromagnet
Magnet Length	55"
Self-Cleaning Drive Motor	5 Hp
Rectifier	8 kW

Conveyor Legs

Motor Gas/Hydraulic 11.7 Hp Gas Honda

Weight (with magnet) - Operating 33,500 lbs

Weight (without magnet) - Travel 25,850 lbs

LWM6065

Conveyor Specs

Belt Width	60"
Belt Length (pulley centers)	65'
Belt Type	4 Ply, 440 PIW, 1/4" Top Cover
Drive Motor	40 Hp
Pan Feeder	48" x 72"
Drive Motor @ 60 hz	2 x 2.4 Hp
Magnet	Dings Electromagnet
Magnet Length	55"
Self-Cleaning Drive Motor	5 Hp
Rectifier	8 kW

Conveyor Legs

Motor Gas/Hydraulic 11.7 Hp Gas Honda

Weight (with magnet) - Operating 65,000 lbs

Weight (without magnet) - Travel 57,500 lbs

