

HIGH PRODUCTION SCREENER

THE **L622S-T** ADAPTS TO A VARIETY OF APPLICATIONS

The most advanced and innovative 22'x6' portable vibratory screening plant today is the L622s-t. Featuring adjustable screen box angles allowing adaptability to a wide range of material applications including quarrying, mining, sand and gravel, coal screening, topsoil, and woodchip. With the highest-grade specifications and component parts, and offering a triple deck makes this screener a top choice for high productivity, quality and value.

- 22x6 heavy duty high energy 2 bearing 2 deck screen box
- 225Hp Cat engine
- Track or wheel mobile
- Integrated hydraulic folding stockpiling conveyors
- Remote control tipping grid
- Fast on site setup time - 15 minutes

LIPPMANN


L622S-T TECHNICAL SPECIFICATIONS

SPECIFICATIONS	
Length - transport 15ft hopper	19.55 (64'-1")
Length - transport 12ft hopper	18.63m (61'.1")
Width	3.66m (12")
Height - transport track	3.59m (11' 09")
Weight - track	40,500 kgs (89,287 lbs)

SCREENBOX	
Top deck dimensions	6710mmx1830mm (22'x6')
Bottom deck dimensions	6100mmx1830mm (20'x6')
Top deck screens - 5 off	6'x4' side tension
Top deck screens - 1 off	6'x2' side tension
Bottom deck screens - 5 off	6'x4' side tension

CONVEYORS	
Side conveyor - stockpile height - track model	5100mm (16'-9")
Side conveyor - belt width	800mm (32")
32 deck transfer conveyor - belt width	1200mm (48")
Feed conveyor - belt width	1200mm (48")
Main conveyor - belt width	1400mm (55")
Tail conveyor - stockpile height - track model	5398mm (17'-8")
Tail conveyor - belt width	900mm (36")

POWER AND HYDRAULICS	
Engine	CAT C7.1 Volvo D5
Engine power	225 hp
Engine speed	1800 rpm

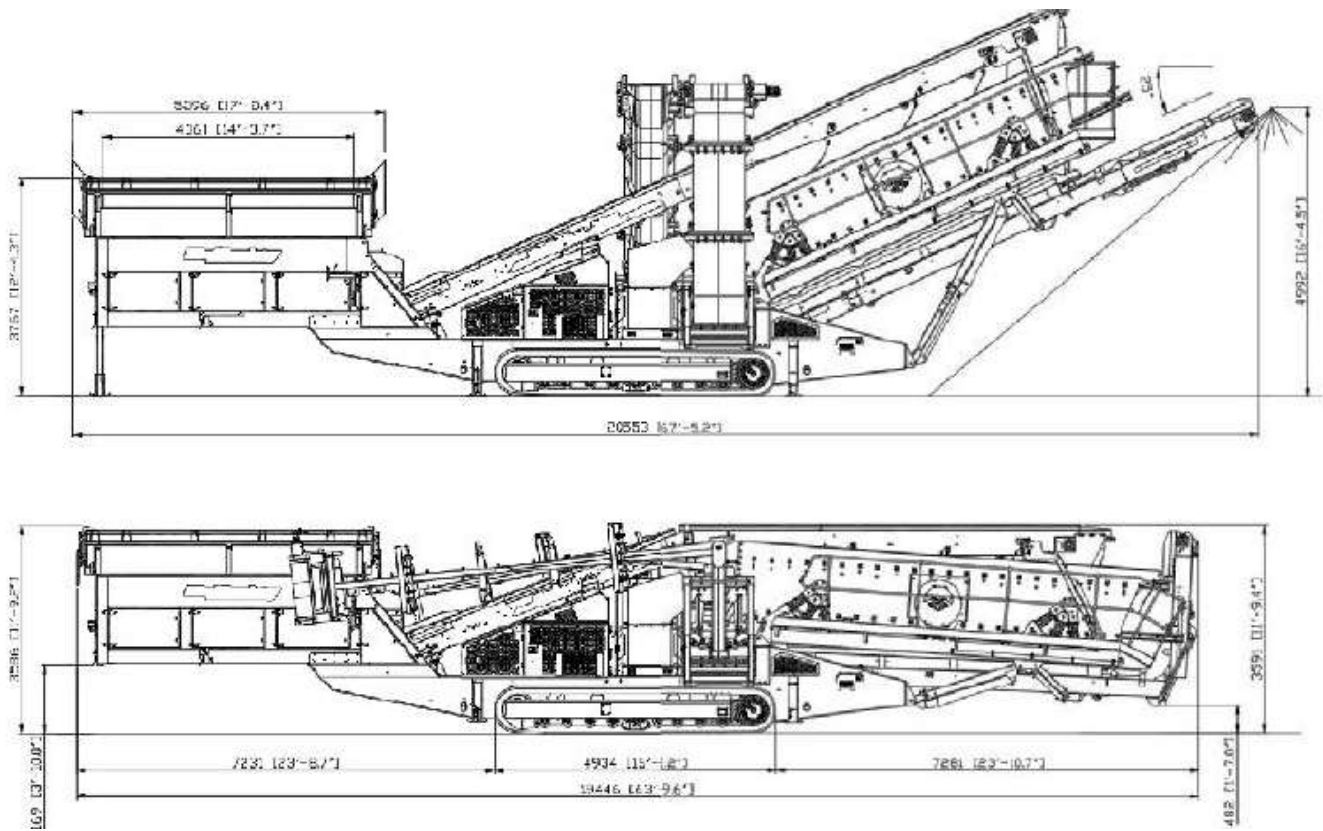

LIPPMANN

3271 East Van Norman Avenue
Cudahy, WI 53110
Lippmann-Milwaukee.com
800-648-0486

AUTHORIZED DISTRIBUTOR